

PW4M...


Single point load cells

Special features

- For determining small masses (0.3 kg ... 3 kg)
- Aluminum
- Off center load compensated
- Shielded connection cable



Dimensions (in mm; 1 mm= 0.03937 inches)

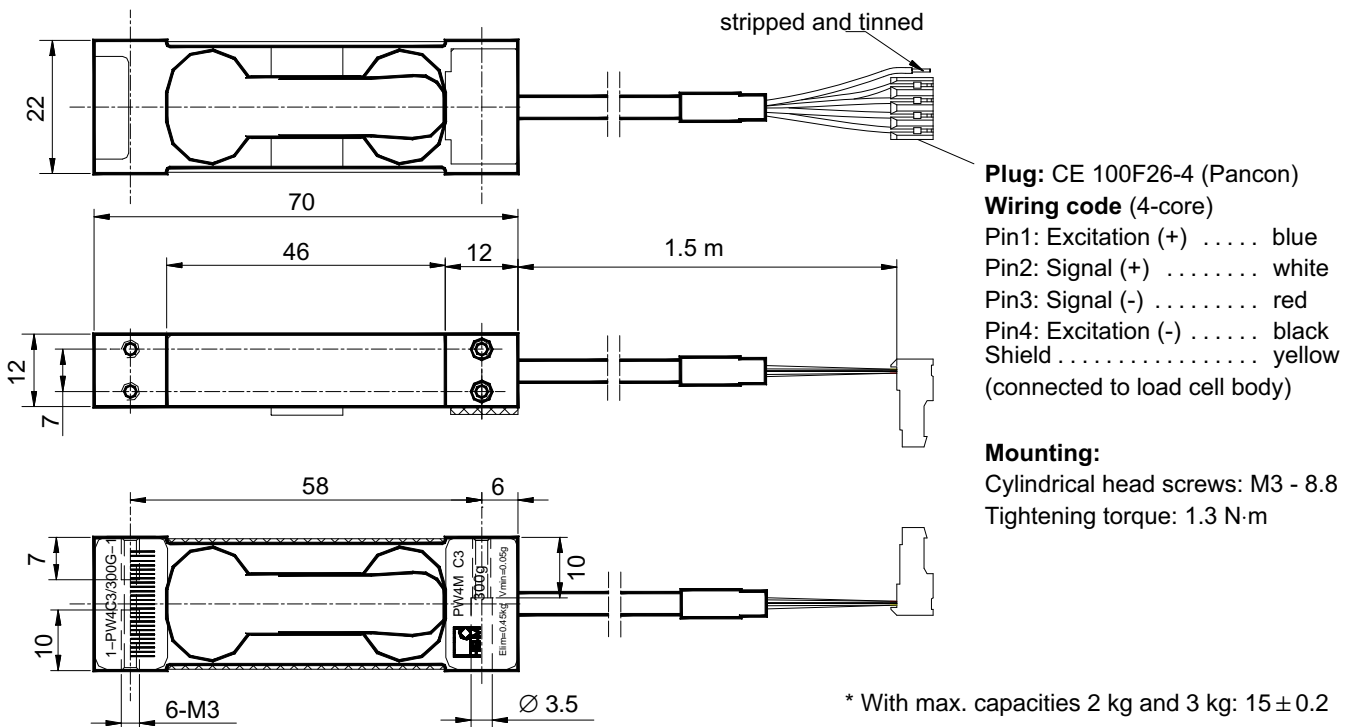

Specifications

Type			PW4MC3...			
Order-No.			1-PW4C3/300G-1	1-PW4C3/500G-1	1-PW4C3/2KG-1	1-PW4C3/3KG-1
Accuracy class ¹⁾			C3			
Maximum number of load cell intervals	n_{LC}		3000			
Maximum capacity ²⁾	E_{max}	kg	0.300	0.500	2	3
Minimum LC verification interval	v_{min}	g	0.05	0.1	0.2	0.5
Temperature effect on zero balance	TK_0	% of. C_n / 10 K	0.0233	0.0280	0.0140	0.0233
Ratio of minimum verification interval	γ		6000	5000	10000	6000
Max. platform size		mm	200 x 200			
Sensitivity	C_n	mV/V	1.0 ± 0.1		2.0 ± 0.2	
Zero signal			0 ± 0.1			
Temperature effect on sensitivity ³⁾	TK_C	% of. C_n / 10 K	± 0.0175 ± 0.0117			
Temperature range: +20 ... +40 °C [68...104 °F] -10 ... +20 °C [14...68 °F]						
Hysteresis error ³⁾	d_{hy}	% of C_n	± 0.0150			
Non-linearity ³⁾	d_{lin}		± 0.0150			
Minimum dead load output return	DR		± 0.0166			
Off center load error ⁴⁾			± 0.0233			
Input resistance	R_{LC}	Ω	300 ... 500			
Output resistance	R_0		300 ... 500			
Reference excitation voltage	U_{ref}	V	5			
Nominal range of excitation voltage	B_U		1 ... 8			
Max. excitation voltage		V	10			
Insulation resistance at 100 V _{DC}	R_{is}	G Ω	> 2			
Nominal temperature range	B_T	°C [°F]	-10 ... +40 [+14...+104]			
Operating temperature range	B_{tu}		-10 ... +50 [+14...+122]			
Storage temperature range	B_{tl}		-25 ... +70 [-13...+158]			
Limit load ⁴⁾ at max. eccentricity	E_L	% of E_{max}	150			
		mm	100			
Lateral load limit, static	E_{lq}	% of E_{max}	200			
Breaking load	E_d		> 300			
Deflection at E_{max} , approx.	s_{nom}	mm	< 0.4			
Weight, without cable, approx.	m	kg	0.07			
Degree of protection ⁵⁾			IP65			
Material:	Measuring body Coating Cable sheath		Aluminum Silicone rubber PVC			

1) In accordance to OIML R60 with $P_{LC} = 0.7$

2) Max. eccentric load according to OIML R76

3) The data for Non-linearity (d_{lin}), Hysteresis error (d_{hy}) and Temperature effect on sensitivity (TK_C) are typical values. The sum of these data meets the requirements according to OIML R60.

4) According to OIML R76

5) According to IEC529

Subject to modifications.

All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

Hottinger Baldwin Messtechnik GmbH
Im Tiefen See 45 · 64293 Darmstadt · Germany
Tel. +49 6151 803-0 · Fax +49 6151 803-9100
Email: info@hbm.com · www.hbm.com

measure and predict with confidence

