

Ease of Use in a Clever Package



Level Recorder **LR-07**

- Records sound or vibration levels
- Records DC voltages
- External control of pen, paper feed, and marker functions
- Measurement with coordinated paper feed
- Operates in sync with level processing equipment



The level recorder LR-07 is ideal for a wide range of applications, including sound and vibration level recording, acoustic transducer measurements, and linear voltage recording

Specifications

Applicable standards	JIS C 1512 Level recorders for sound level meters and vibration level
Input section	
Input impedance	50 k Ω , unbalanced
Voltage required for full-scale point	AC: 0.2 V to 10 V (RMS) DC: 0.5 V to 25 V
Maximum allowable input voltage	AC: 35 V (RMS) DC: 50 V
Recorder section	
Recording principle	Automatic balancing
Frequency range	Recording range 25 or 10 dB: 1 Hz to 100 kHz (tolerance ± 1 dB) Recording range linear: 1 Hz to 100 kHz (± 10 % of full-scale point) Recording range 50 dB: 1 Hz to 20 kHz (tolerance ± 0.5 dB, 1 dB at 1 Hz)
Dynamic characteristics	FAST, SLOW, VL (vibration level), FF (averaging time constant 10 ms)
Recording pen	Felt-tip pen LB-25B (RED)
Recording pen response	Exponential
Recording pen speed	400 mm/s or more
Recording paper(normal paper)	For level recording: RP-01D
Paper feed motor	Pulse motor
Paper feed rate (8 selectable steps)	0.01, 0.03, 0.1, 0.3, 1, 3, 10, 30 mm/s or external control (pulse drive) ; tolerance ± 2 % or less
Paper speed control measurement	Available in for 50 dB recording range Paper feed rate increase by factor 10 when input signal exceeds a preset trigger level (not valid at 30 mm/s, 10 mm/s, 3 mm/s, and external control) Trigger level settings: 10, 15, or 20 dB above lower measurement limit
Power requirements	Dry-cell batteries (IEC R20, size "D") $\times 6$, External power supply input
Ambient conditions	0 to +50 $^{\circ}$ C, max. 90 %RH, no condensation (when operated with dry-cell batteries) -10 to +50 $^{\circ}$ C, max. 90 %RH, no condensation (when operated with AC adapter or rechargeable battery pack)
Dimensions and weight	Approx. 122(H) \times 250(W) \times 325(D)mm, Approx. 3.6 kg
Supplied accessories	Input cable NC-39A $\times 1$ Recording paper RP-01D $\times 2$ Dry-cell batteries (IEC R20, size "D") $\times 6$ Carrying case $\times 1$ Level recorder pen (RED) $\times 6$ Spare pen holder $\times 1$ Dual-sided adhesive tape $\times 1$ Miniature screwdriver $\times 1$ Calibration position sticker set $\times 1$ Instruction manual $\times 1$

Optional equipment

Name	Model
Recording paper	RP-01D
Level recorder pen (RED)	LB-25B
AC adapter	NC-97
BNC-RCA cable	CC-24
Car battery adapter	CC-82
Chart winder	LB-23

Versatile external control

Pen movement, paper feed start/stop, marker operation, and paper feed rate selection can be controlled from other equipment.

Paper-feed controlled measurement

When the measured sound or vibration level exceeds a certain threshold, paper feed can be automatically increased for easier reading of the recorded information. This saves paper and is useful for example in train and airplane noise measurements or other situations where non-continuous events are to be recorded.

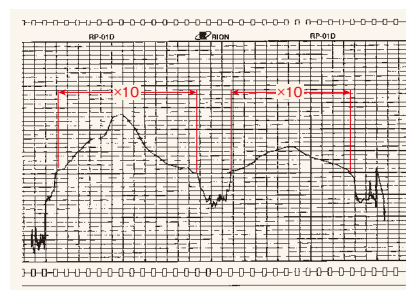


Fig. Paper feed rate increases by factor 10 when preset Trigger level is exceeded (using recording paper RP-01D)

Chart winder option

For long-term measurements, a chart winder with a matching design is available.



Chart winder LB-23



RIION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality & Environmental Management system Center of RIION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.



ISO 14001 RIION CO., LTD.
ISO 9001 RIION CO., LTD.

* Specifications subject to change without notice.

Distributed by:

 **RIION CO., LTD.**
<http://rion-sv.com/>

3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan
Tel: +81-42-359-7888 Fax: +81-42-359-7442

This leaflet is printed with environmentally friendly UV ink on recycled paper.